Beovox C30, C40
Type 6325, 6324

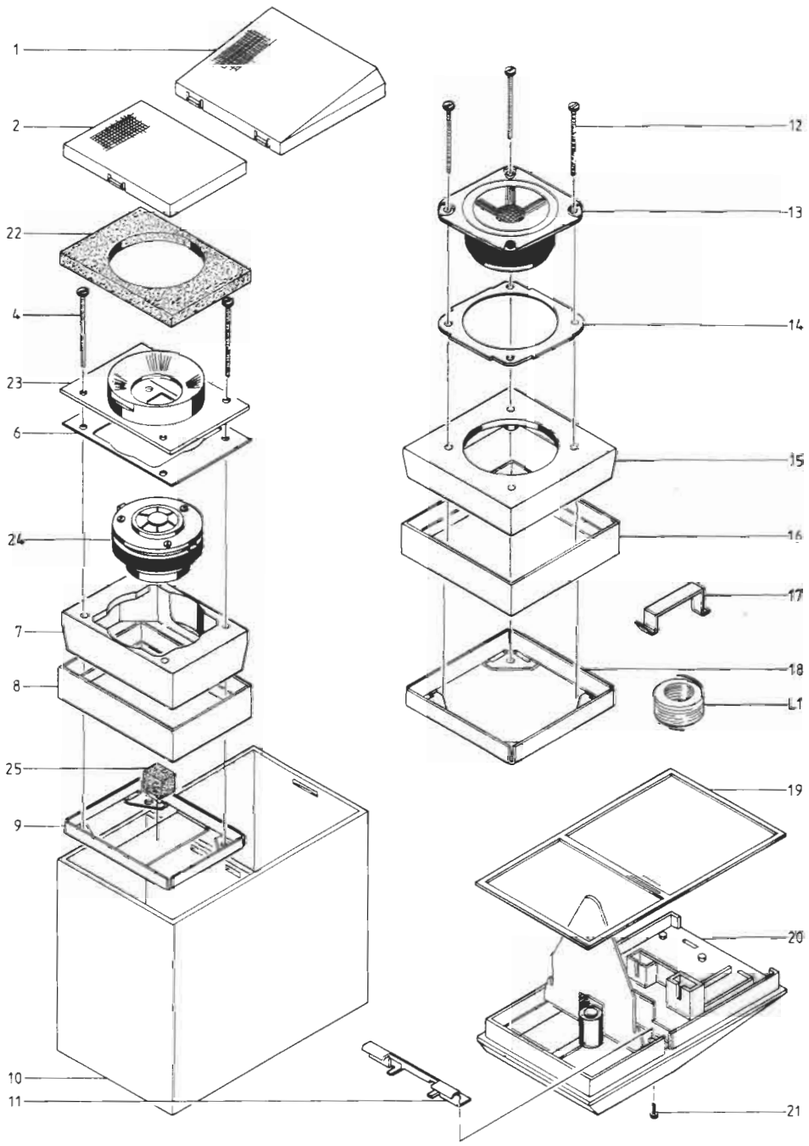

Mekanisk stykliste/
List of Mechanical Parts

Gældende fra apparat nr. 2481001

1	3450402	Forplade	Front panel
2	3450403	Forplade	Front panel
4	2043009	Skrue AM4 x 55	Screw AM4 x 55
6	3340023	Pakningssæt	Set of gaskets
7	3440028	Baffel	Baffel
8	3340021	Pakning	Gasket
9	2548155	Vinkel	Bracket
10	3430216	Kabinet, alu. C40	Cabinet, alu. C40
	3430243	Kabinet, alu. C30	Cabinet, alu. C30
	3430218	Kabinet, sort C40	Cabinet, black C40
	3430252	Kabinet, sort C30	Cabinet, black C30
11	2548156	Vinkel	Bracket
12	2043009	Skrue AM4 x 55	Screw AM4 x 55
13	8480143	Højttaler	Loudspeaker
14	3340023	Pakningssæt	Set of gaskets
15	3440027	Baffel	Baffel
16	3340020	Pakning	Gasket
17	2510126	Bøjle	Clamp
18	2548154	Vinkel	Bracket
19	3340023	Pakningssæt	Set of gaskets
20	3452335	Bagplade	Back panel
21	2013093	Skrue M2,9 x 19	Screw M2,9 x 19
22	3917057	Pakning	Gasket
23	2641089	Holder	Holder
24	8480159	Højttaler	Loudspeaker
25	2645038	Gummiklods	Rubber block

Ikke viste dele/
Parts Not Shown

3391533	Yderæske	Outer carton
3391534	Indlæg	Insert
3397322	Skumemballage	Foam packing
6270178	Højttalerledning 4 m	Loudspeaker lead 4 m
3912038	Filtoblat (8 stk.)	Felt washer (8 pieces)

C40

C30

3391602	Yderæske	Outer carton
3391603	Indlæg	Insert
3397322	Skumemballage	Foam packing
6270178	Højttalerledning 4 m	Loudspeaker lead 4 m
3390142	Pose med løsdele	Bag with spare parts
3912038	Filtoblat (8 stk.)	Felt washer (8 pieces)

Diagram



Elektrisk stykliste/
List of Electrical Parts

C1	4200336	6.8 µF	L1	6850144	0.33 mH

Tekniske data se side 27/37/
Technical Data see page 27/37

Beovox C75
Type 6323

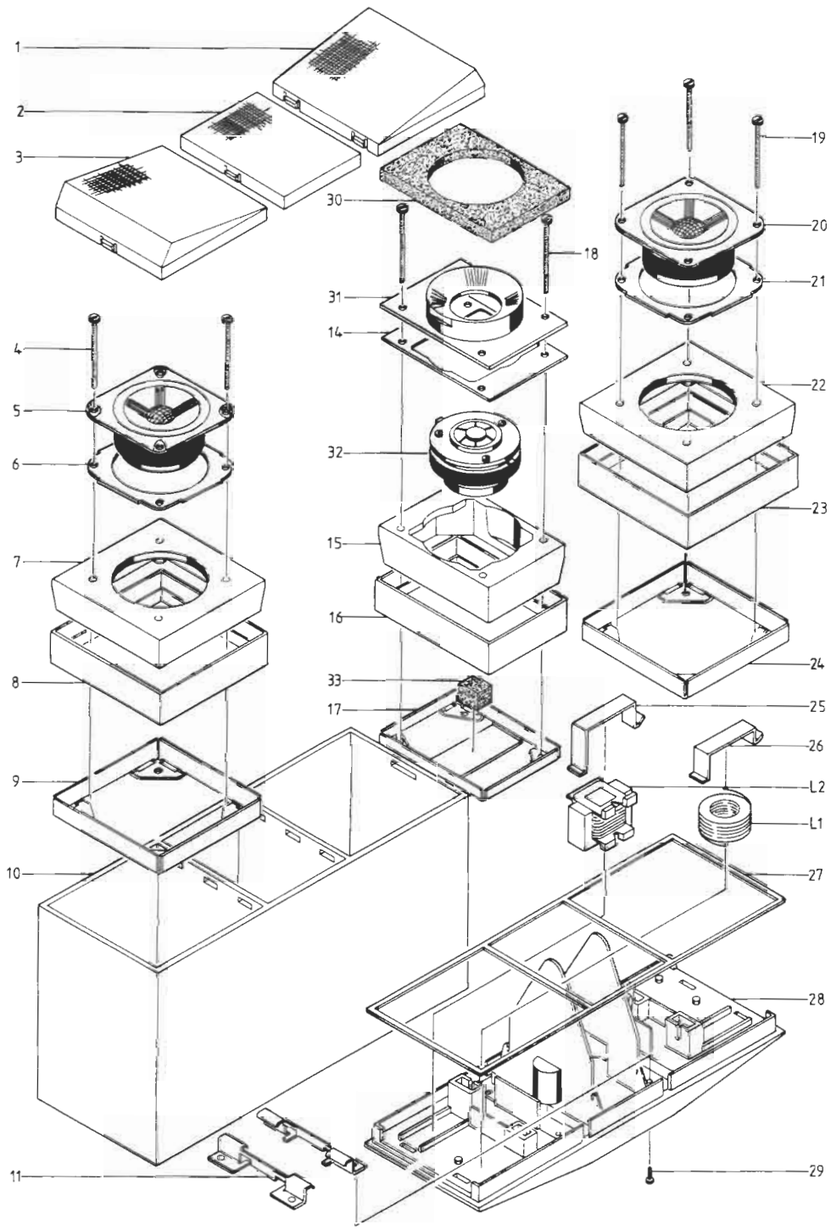

Mekanisk stykliste/
List of Mechanical Parts

Gældende fra apparat nr. 2481001

1	3450402	Forplade	Front panel
2	3450403	Forplade	Front panel
3	3450402	Forplade	Front panel
4	2043009	Skrue AM4 x 55	Screw AM4 x 55
5	8480143	Højttaler	Loudspeaker
6	3340022	Pakningssæt	Set of gaskets
7	3440027	Baffel	Baffel
8	3340020	Pakning	Gasket
9	2548154	Vinkel	Bracket
10	3430215	Kabinet, alu.	Cabinet, alu.
	3430217	Kabinet, sort	Cabinet, black
11	2548156	Vinkel	Bracket
14	3340022	Pakningssæt	Set of gaskets
15	3440028	Baffel	Baffel
16	3340021	Pakning	Gasket
17	2548155	Vinkel	Bracket
18	2043009	Skrue AM4 x 55	Screw AM4 x 55
19	2043009	Skrue AM4 x 55	Screw AM4 x 55
20	8480141	Højttaler	Loudspeaker
21	3340022	Pakningssæt	Set of gaskets
22	3440027	Baffel	Baffel
23	3340020	Pakning	Gasket
24	2548154	Vinkel	Bracket
25	2510125	Bøjle	Clamp
26	2510126	Bøjle	Clamp
27	3340022	Pakningssæt	Set of gaskets
28	3452334	Bagplade	Back panel
29	2013093	Skrue M2,9 x 19	Screw M2.9 x 19
30	3917057	Pakning	Gasket
31	2641089	Holder	Holder
32	8480159	Højttaler	Loudspeaker
33	2645038	Gummiklods	Rubber block

Ikke viste dele/
Parts Not Shown

3391531	Yderæske	Outer carton
3391532	Indlæg	Insert
3397322	Skumemballage	Foam packing
6270178	Højttalerledning 4 m	Loudspeaker lead 4 m
3912038	Filtoblat (8 stk.)	Felt washer (8 pieces)

Diagram

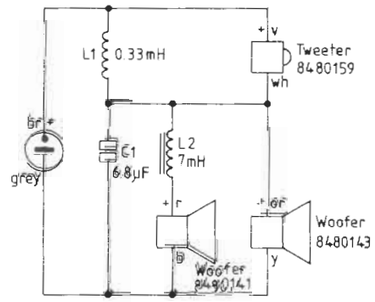

Elektrisk stykliste/
List of Electrical Parts

L1	6850144	0.33 mH	C1	4200336	6.8 µF
L2	6850125	7 mH (6.5 mH)			

Tekniske data se side 29/
Technical Data see page 29

BEOVOX CX100, TYPE 6343

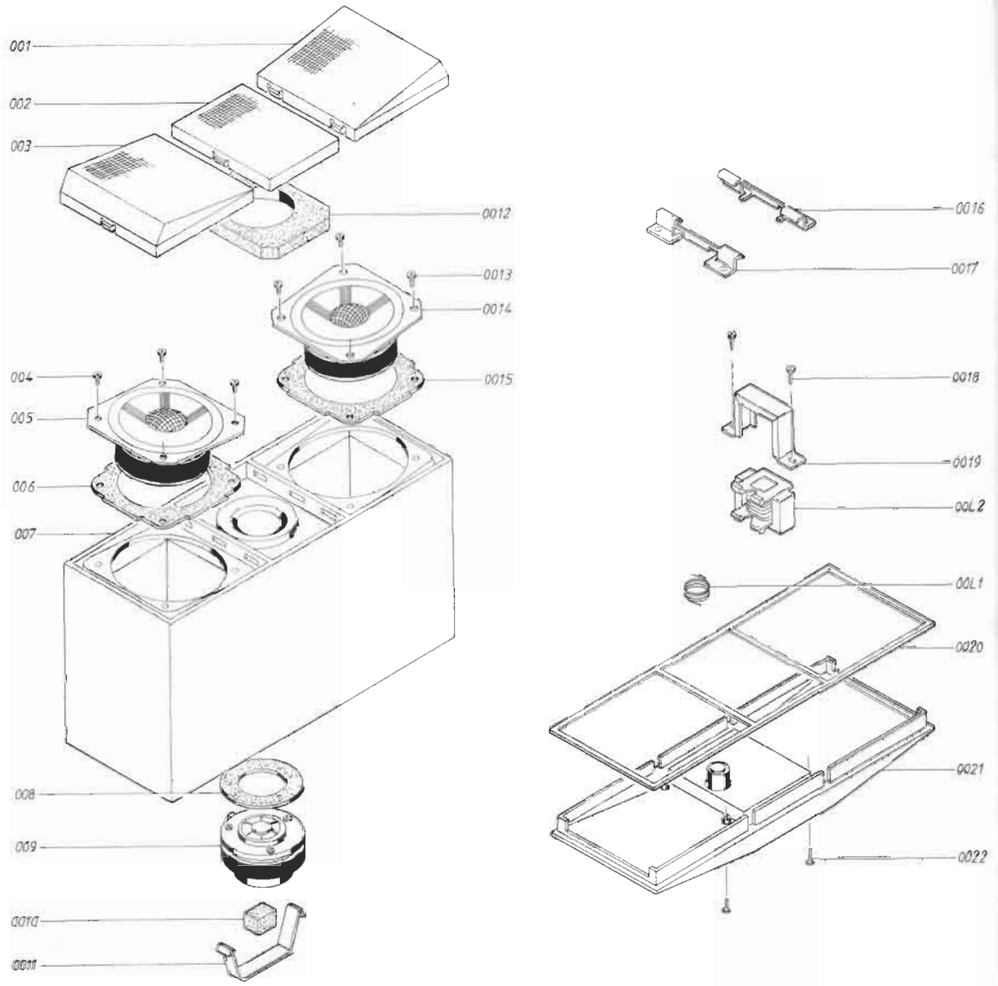

Mekanisk stykliste
List of Mechanical Parts

001	3450402	Forplade	Front panel
002	3450403	Forplade	Front panel
003	3450402	Forplade	Front panel
004	2039027	Skrue AM3x6	Screw AM3x6
005	8480173	Højttaler	Loudspeaker
006	3340053	Pakningssæt	Set of gaskets
007	3430327	Kabinet, aluminium	Cabinet, aluminium
	3430329	Kabinet, sort	Cabinet, black
008	3340053	Pakningssæt	Set of gaskets
009	8480159	Højttaler	Loudspeaker
0010	2645044	Gummiklods	Rubber block
0011	2510025	Bøjle	Clamp
0012	3340052	Pakning	Gasket
0013	2039027	Skrue AM3x6	Screw AM3x6
0014	8480174	Højttaler	Loudspeaker
0015	3340053	Pakningssæt	Set of gaskets
0016	2548156	Vinkel	Bracket
0017	2548156	Vinkel	Bracket
0018	2015065	Skrue M3,5x13	Screw M3.5x13
0019	2510147	Vinkel	Bracket
0020	3340053	Pakningssæt	Set of gaskets
0021	3452497	Bagplade	Back panel
0022	2013093	Skrue M2.9x19	Screw M2.9x19

Ikke viste dele
Parts Not Shown

	3390255	Pose m. vægbeslag	Bag with wall bracket
	3546000	Monteringsvejledning	Mounting Instruktion
	3391531	Yderæske	Outer carton
	3391532	Indlæg	Insert
	3397434	Skumemballage	Foam packing
	3912038	Filtoblat (8 stk)	Felt washer (8 pieces)
	6270178	Højttalerledning 4 m	Loudspeaker lead 4 m

Elektrisk stykliste
List of Electrical Parts

C1	4200336	6.8 µF
L1	6850144	0.33 mH
L2	6850014	7 mH

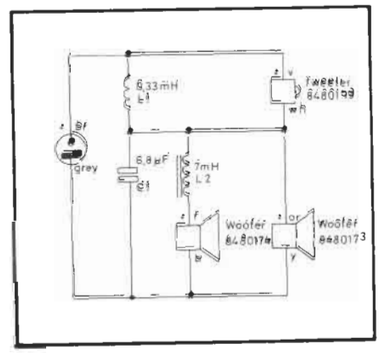

Technical specifications

RMS power handling capacity	100 watts
Music power handling capacity	110 watts
Impedance	6 ohms
Frequency response +4 -8 dB	50-20,000 Hz
Frequency response ±4 dB	75-20,000 Hz
Power at 96 dB SPL	5 watts
Sensitivity 1 W	89 dB
Cabinet type	Pressure chamber
Distortion 250-1000 Hz	≤3%
Distortion >1000 Hz	≤1%
Dispersion	90°
Woofer	2 units 4" - 10 cm
Tweeter	1" - 2.5 cm
Crossover frequency	140 Hz/2500 Hz
Net volume	4 litres
Cross volume	6.8 litres
Dimensions WxHxD	12x32x20.5 cm
Weight	5 kg
Accessories	Wall mounting included

Subject to change without notice

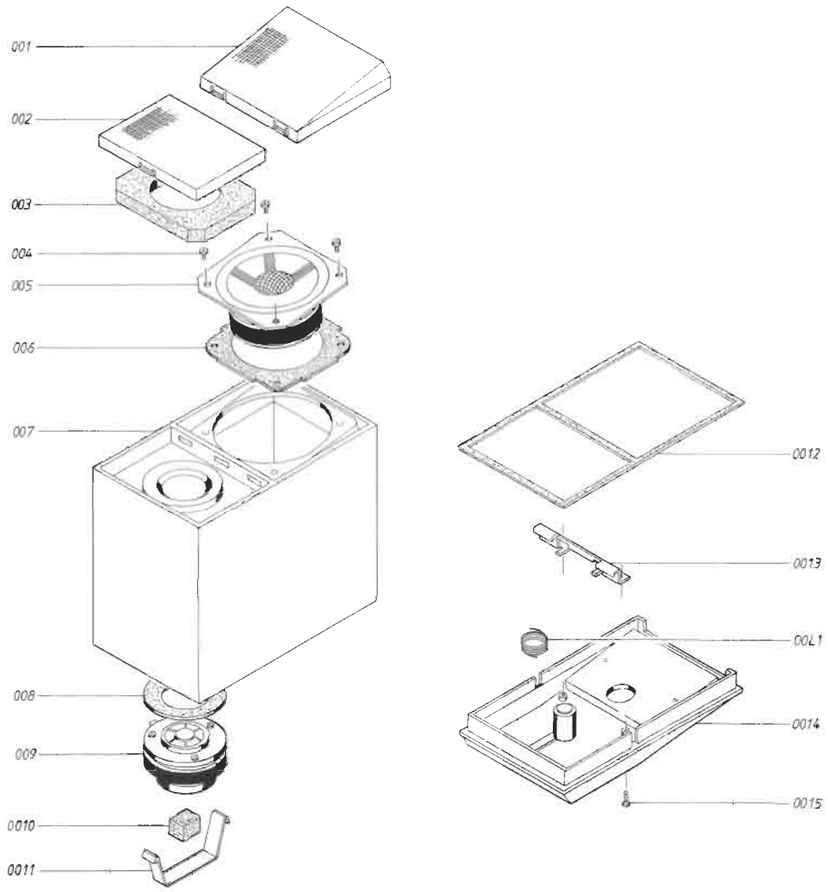

Mekanisk stykliste
List of Mechanical Parts

001	3450402	Forplade	Front panel
002	3450403	Forplade	Front panel
003	3340052	Pakning	Gasket
004	2039027	Skrue AM3x6	Screw AM3x6
005	8480173	Højttaler	Loudspeaker
006	3340054	Pakningssæt	Set of gaskets
007	3430326	Kabinet, aluminium	Cabinet, aluminium
	3430328	Kabinet, sort	Cabinet, black
008	3340054	Pakningssæt	Set of gaskets
009	8480159	Højttaler	Loudspeaker
0010	2645044	Gummiklods	Rubber block
0011	2510025	Bøjle	Clamp
0012	3340054	Pakningssæt	Set of gaskets
0013	2548156	Vinkel	Bracket
0014	3452496	Bagplade	Back panel
0015	2013093	Skrue M2,9x19	Screw M2.9x19

Ikke viste dele
Parts Not Shown

3390256	Pose m. vægbeslag	Bag with wall bracket
3546000	Monteringsvejledning	Mounting instruction
3391533	Yderæske	Outer carton
3391534	Indlæg	Insert
3397434	Skumemballage	Foam packing
3912038	Filtoblat (8 stk)	Felt washer (8 pieces)
6270178	Højttalerledning 4 m	Loudspeaker lead 4 m

Elektrisk stykliste
List of Electrical Parts

C1	4200336	6.8 µF
L1	6850144	0.33 mH

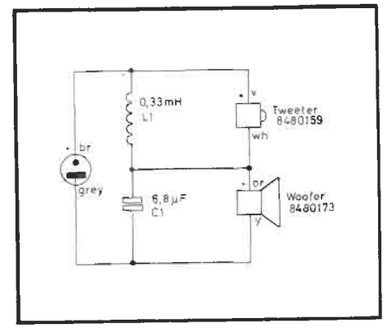

Technical specifications

RMS power handling capacity	50 watts
Music power handling capacity	60 watts
Impedance	6 ohms
Frequency response +4 -8 dB	80-20,000 Hz
Frequency response ±4 dB	120-20,000 Hz
Power at 96 dB SPL	5 watts
Sensitivity 1 W	89 dB
Cabinet type	Pressure chamber
Distortion 250-1000 Hz	<3%
Distortion >1000 Hz	<1%
Dispersion	90°
Woofer	4" - 10 cm
Tweeter	1" - 2.5 cm
Crossover frequency	2500 Hz
Net volume	2 litres
Cross volume	4.4 litres
Dimensions WxHxD	12x20.5x20.5 cm
Weight	3.5 kg
Accessories	Wall mounting included

Subject to change without notice

BEOVOX X25, TYPE 6335
BEOVOX S2200, TYPE 6338

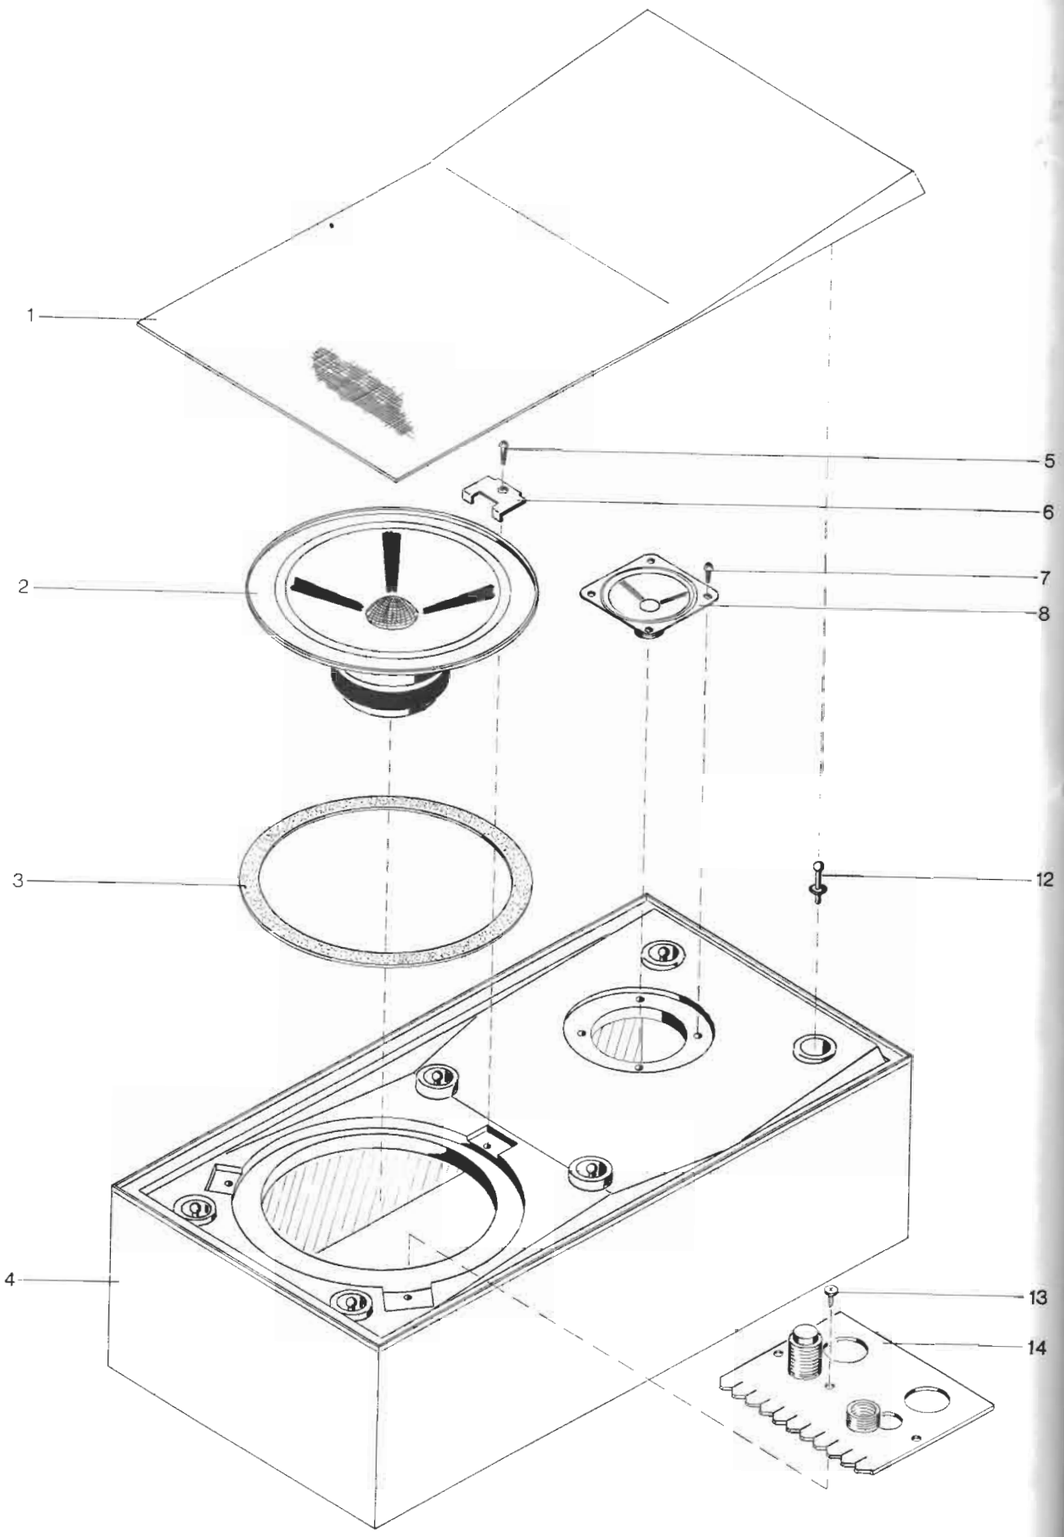

Mekanisk stykliste
List of Mechanical Parts

1	3450345	Forplade	Front panel
2	8480171	Højttaler	Loudspeaker
3	3340015	Pakning	Gasket
4	3414207	Kabinet	Cabinet
5	2015108	Skrue 3.5x16	Screw 3.5x16
6	0285091	Spændestykke	Clamp
7	2015108	Skrue 3,5x16	Screw 3.5x16
8	8480054	Højttaler	Loudspeaker
12	2391045	Låsestykke	Locking pin
13	2015201	Skrue 3,5x9,5	Screw 3.5x9.5
14	8006000	Delefilter	Crossover network

Ikke viste dele
Parts Not Shown

3391454	Yderæske	Outer carton
3397435	Skumemballage, sæt	Foam packing, set
6270167	Højttalerledning 4 m	Loudspeaker lead 4 m

Elektrisk stykliste
List of Electrical Parts

R1	5020591	6.8 Ω 5% 2W
R2	5100315	3.3 Ω 10% 5W
C1	4200077	8 µF 20% 23V
C2	4200387	4.7 µF 20% 23V
L1	6850130	Coil 1mH
L2	6850128	Coil 0.47mH

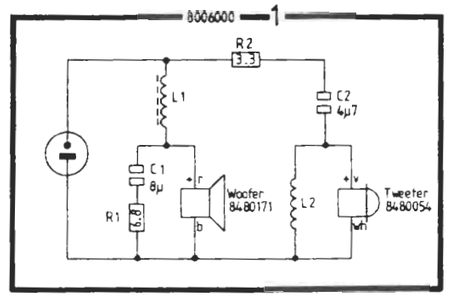

Technical specifications

RMS power handling capacity	25 watts
Music power handling capacity	35 watts
Impedance	8 ohms
Frequency response +4 -8 dB	55-20,000 Hz
Frequency response ±4 dB	90-20,000 Hz
Power at 96 dB SPL	6.3 watts
Sensitivity 1 W	88 dB
Cabinet type	Pressure chamber
Distortion 250-1000 Hz	<1.5%
Distortion 1000-2000 Hz	<1%
Distortion 2000 Hz	<0.9%
Dispersion	90°
Woofer	6 ¼" - 16 cm
Tweeter	2½" - 6.6 cm
Crossover frequency	2000 Hz
Net volume	8.4 litres
Cross volume	12.4 litres
Dimensions WxHxD	22x41x15 cm
Weight	4 kg

Subject to change without notice

BEOVOX X35, TYPE 6336

Identisk med Beovox S30, type 6317, med undtagelse af nedennævnte dele.
Se tegning og øvrige dele side 38 og 39.

Identical with Beovox S30, type 6317, except for the belowmentioned parts.
Se drawing and other parts pages 38 and 39.

Mekanisk stykliste
List of Mechanical parts

2	2015108	Skrue M3,5x16	Screw M3.5x16
7	2015201	Skrue M3,5x9,5	Screw M3.5x9.5
9	3414237	Kabinet	Cabinet
10	2015108	Skrue M3,5x16	Screw M3.5x16
	3397436	Skumemballage, sæt	Foam packing, set

Technical specifications

RMS power handling capacity	30 watts
Music power handling capacity	50 watts
Impedance	8 ohms
Frequency response +4 -8 dB	65-20,000 Hz
Frequency response ±4 dB	75-18,000 Hz
Power at 96 dB SPL	2.5 watts
Sensitivity 1 W	92 dB
Cabinet type	Pressure chamber
Distortion 250-1000 Hz	<2.5%
Distortion >1000 Hz	<1%
Dispersion	100°
Woofer	8" - 20 cm
Tweeter	1" - 2.5 cm
Crossover frequency	3000 Hz
Net volume	12 litres
Cross volume	22 litres
Dimensions WxHxD	26x48x18 cm
Weight	5 kg

Subject to change without notice

BEOVOX MCX35, TYPE 6351
BEOVOX MC35, TYPE 6350

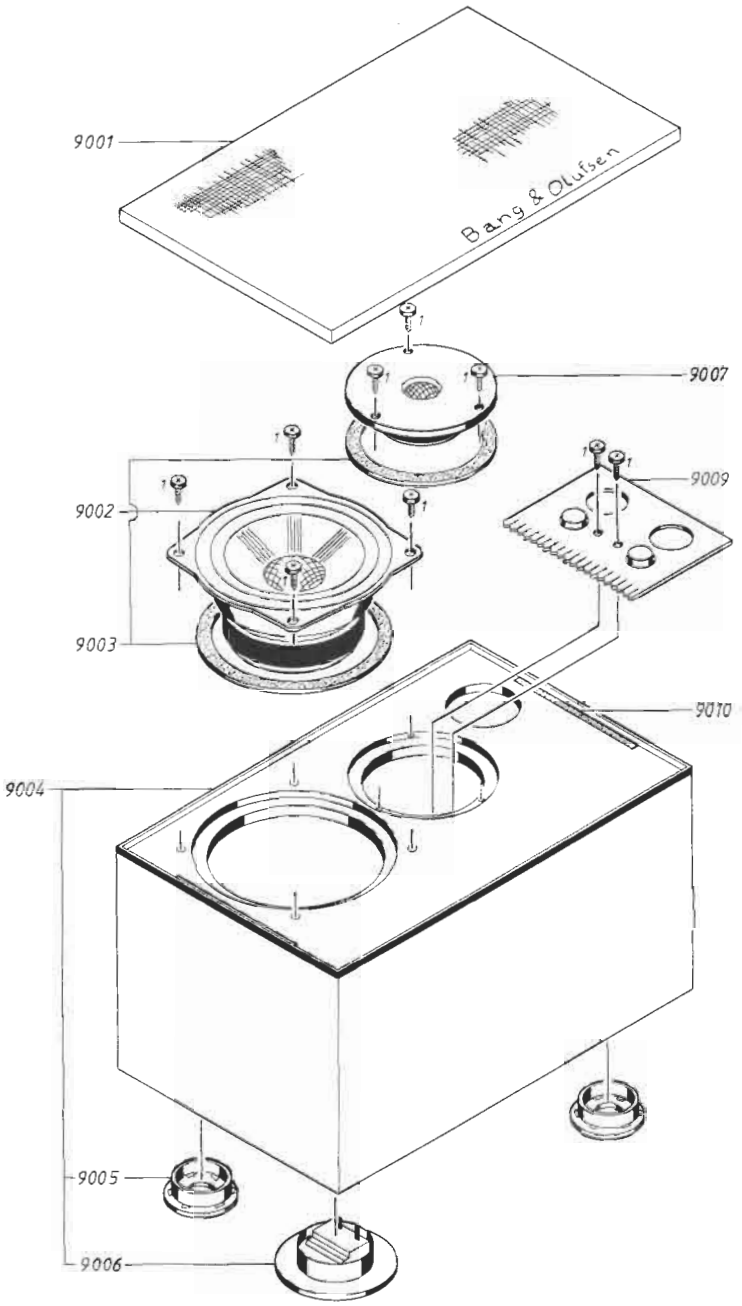

Mekanisk stykliste
List of Mechanical Parts

9001	3450690	Forplade	Front panel
9002	8480198	Bas højttaler	Woofer
9003	3340069	Pakningssæt	Set of gaskets
9004	3414015	Kabinet metal grå, MCX35	Cabinet metal grey, MCX35
	3414012	Kabinet super hvid, MCX35	Cabinet super white, MCX35
	3414007	Kabinet teak, MC35	Cabinet teak, MC35
	3414008	Kabinet palisander, MC35	Cabinet rosewood, MC35
	3414009	Kabinet eg, MC35	Cabinet oak, MC35
9005	3031035	Beslag	Fitting
9006	7210602	Dobbelt stikterminal	Double connection terminal
9007	8480199	Diskant højttaler	Tweeter
9009	8039074	Delefilter	Crossover network
9010*	3947132	Dobbeltsidet tape	Double coated tape

Skrueoversigt
Survey of screws

1	2084042	Skrue 3,5x13	Screw 3.5x13

**Leveres i metermål*

**Supplied by the metre*

Ikke viste dele
Parts not shown

3391835	Yderæske	Outer carton
3390289	Skumpose	Foam bag
3397614	Skumemballage sæt	Foam packing set
3989011	Rock-wool klods	Rock-wool block
6270167	Ledning 4 m	Cable 4 m

Diagram

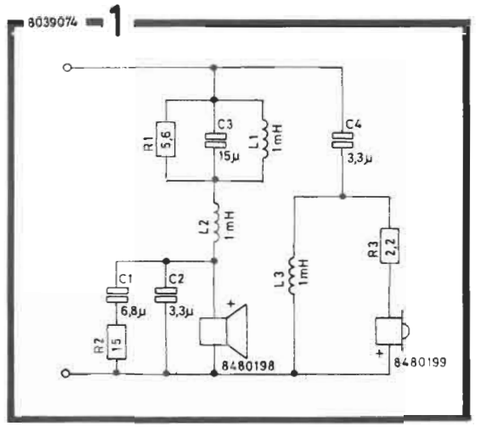

Elektrisk stykliste
List of Electrical Parts

R1	5100297	5.6 Ω 10% 3W	R3	5104011	2.2 Ω 10% 3W
R2	5100200	15 Ω 10% 3W			
C1	4200336	6.8 µF 20% 23V	C3	4200273	15 µF 20% 23V
C2	4200125	3.3 µF 20% 23V	C4	4200125	3.3 µF 20% 23V

For udskiftning af spoler L1 - L3 bestilles komplet delefilter.

When replacing coils L1 - L3, order complete crossover network.

Technical specifications

RMS power handling capacity	35 watts
Music power handling capacity	50 watts
Impedance	8 ohms
Frequency range +4 -8 dB	48-20,000 Hz
Power at 96 dB SPL	2.5 watts
Sensitivity 1 W	92 dB
Acoustic principle	Bass Reflex
Woofer	5" - 13 cm
Tweeter	3/4" - 1.8 cm
Crossover frequency	3500 Hz
Net. volume	10 litres
Dimensions WxHxD	20 x 32.5 x 19.5 cm
Weight	3.6 kg

Subject to change without notice

Adskillelse

Dismantling

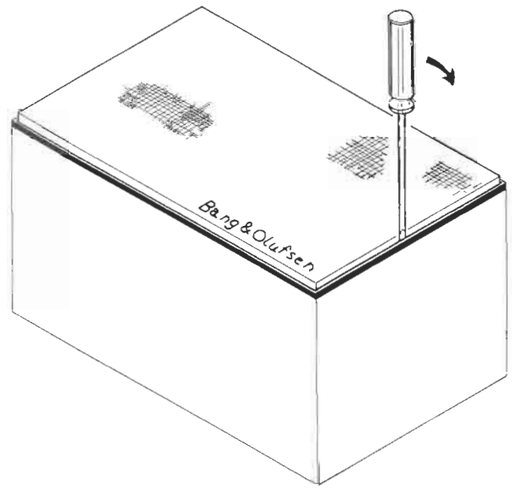

For servicering aftages forplade.

Forpladen er fastgjort med en speciel dobbeltklæbende tape, som bevarer klæbeevnen og derfor kan bruges igen.

Remove front plate for servicing.

The front plate is fixed with a special double adhesive tape which retains its adhesiveness and can therefore be reused.